



中国认可
国际互认
检测
TESTING
CNAS L4065



Report No.:
报告编号: GDLK2EAI01U

UN38.3 TEST REPORT

UN38.3 检测报告

Product Name: Rechargeable Li-ion Battery
产品名称: 二次锂离子电池组

Model and Parameters: C1264C6, 21.6Vdc, 10.4Ah, 224.64Wh
型号参数:

Test Classification: Commission test
检测类别: 委托检测

Issue Date: 2024-12-13
签发日期:

Tested by/测试	Reviewed by/审核	Approved by/批准
Test Engineer	Audit Engineer	Approval Engineer

Guangzhou MCM Certification & Testing Co., Ltd.
广州邦禾检测技术有限公司

General Information 基本信息	
Application Information/申请信息:	
Applicant: 申请单位:	Guangdong Pow-Tech New Power Co.,Ltd. 广东力科新能源有限公司
Address: 申请单位地址:	No.9, Hengdong 3Rd, Hengkeng Shiling Industry Zone, Liaobu Town, Dongguan, Guangdong, P.R. China 东莞市寮步镇横坑石岭工业区横东三路9号
Contact Information: 联系方式:	Tel: 0769-83527366-8056 E-mail: wangcong@szpowtech.com.cn Website: www.szpowtech.com.cn
General Information/基本信息:	
Product Name: 产品名称:	Rechargeable Li-ion Battery 二次锂离子电池组
Product Classification: 产品分类:	Lithium ion Battery 锂离子电池
Trade Mark: 商标名称:	/
Model and Rating: 型号和额定值:	C1264C6, 21.6V, 10.4Ah, 224.64Wh
Manufacturer: 制造单位:	Guangdong Pow-Tech New Power Co.,Ltd. 广东力科新能源有限公司
Address: 制造单位地址:	No.9, Hengdong 3Rd, Hengkeng Shiling Industry Zone, Liaobu Town, Dongguan, Guangdong, P.R. China 东莞市寮步镇横坑石岭工业区横东三路9号
Contact Information: 联系方式:	Tel: 0769-83527366-8056 E-mail: wangcong@szpowtech.com.cn Website: www.szpowtech.com.cn
Factory: 生产单位:	Guangdong Pow-Tech New Power Co.,Ltd. 广东力科新能源有限公司
Address: 生产单位地址:	No.9, Hengdong 3Rd, Hengkeng Shiling Industry Zone, Liaobu Town, Dongguan, Guangdong, P.R. China 东莞市寮步镇横坑石岭工业区横东三路9号
Testing Laboratory/测试实验室:	
Laboratory: 测试单位:	Guangzhou MCM Certification & Testing Co., Ltd. 广州邦禾检测技术有限公司
Address: 测试单位地址:	Building 2 No. 45 Zhong Er Section of Shiguang Road, Zhongcun Street, Panyu District, Guangzhou City, Guangdong Province, China. 中国广东省广州市番禺区钟村街市广路钟二路段 45 号 2 栋
Testing Location: 测试实验室地址:	As above 同上
Test Standard/测试标准:	
Standard Used: 使用标准:	UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.8, section 38.3 联合国《试验和标准手册》ST/SG/AC.10/11/Rev.8,section 38.3
Deviation Description: 偏差描述:	None 无

Product Information/产品信息:

This battery is constructed with 24 lithium ion cells through 6S4P and has overcharge, over-discharge, over current and short-circuits proof circuit.
 电池由 24 个电芯通过 6 串 4 并组成, 含有过充、过放、过流和短路的保护线路。

Label/标签:**Technical Parameters/技术参数:**

Object 测试对象	Cell 电芯	Battery 电池
Model 型号	INR18650-26E	C1264C6
Rated Capacity 额定容量 (mAh)	2600	10400
Nominal Voltage 标称电压 (V)	3.65	21.6
Standard Charge Current 标准充电电流 (mA)	1300	3000
Standard Discharge Current 标准放电电流 (mA)	2600	1500
Maximum Charge Current 最大充电电流 (mA)	5200	5200
Maximum Discharge Current 最大放电电流 (mA)	7800	15000
Maximum Charge Voltage 最大充电电压 (V)	4.25	25.2
Cut-Off Voltage 放电截止电压 (V)	2.75	16.5
Remark/备注:		
/		

Test Conclusion 测试结论				
Clause 条款	Test Item 测试项目	Sample No. 样品编号	Test Result 测试结论	Remark 备注
38.3.3.1(f)	(Small battery assembly to LBs) (小型电池总成, 锂电池)	/	N/A	/
38.3.3.1(g)	(Large battery assembly to LBs) (大型电池总成, 锂电池)	/	N/A	/
38.3.3.2(d)	(Small battery assembly to SIBs) (小型电池总成, 钠离子电池)	/	N/A	/
38.3.3.2(e)	(Large battery assembly to SIBs) (大型电池总成, 钠离子电池)	/	N/A	/
38.3.4.1	Altitude simulation 高度模拟	B1#~B8#	P	/
38.3.4.2	Thermal test 温度循环测试		P	/
38.3.4.3	Vibration 振动		P	/
38.3.4.4	Shock 冲击		P	/
38.3.4.5	External short circuit 外部短路		P	/
38.3.4.6	Impact/Crush 撞击/挤压	C11#~C20#	P	/
38.3.4.7	Overcharge 过度充电	B9#~B16#	P	/
38.3.4.8	Forced discharge 强制放电	C11#~C30#	P	/
Ambient Temperature: 环境温度:		20 ± 5°C		
Receipt Date: 接收日期:		2024-11-14		
Test Date: 测试时间:		2024-11-14 ~ 2024-12-03		
Test Conclusion/测试结论:				
<p>The samples submitted by Guangdong Pow-Tech New Power Co.,Ltd. have passed the test items of UN Manual of Test and Criteria ST/SG/AC.10/11/Rev.8, section 38.3.</p> <p>由广东力科新能源有限公司送检的样品符合联合国《试验和标准手册》ST/SG/AC.10/11/Rev.8, section 38.3 的要求。</p>				
Seal: 检测专用章:				

UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.8, section 38.3 联合国《试验和标准手册》ST/SG/AC.10/11/Rev.8,section 38.3			
Clause 条款	Requirement + Test 要求+测试方法	Result - Remark 结果-备注	Verdict 判断
38.3.2	Scope 范围		P
38.3.3	Number and condition of cells and batteries to be tested 待测电芯/电池的数量与状态		P
38.3.3.1	Testing of lithium cells and batteries 锂电芯和电池的测试		P
38.3.3.1 (a)~(e)	(Number and condition of cells and batteries under T.1~T.8) T.1~T.8 下的电芯/电池的数量与状态		P
38.3.3.1 (f)	(Small battery assembly to LBs) (小型电池总成, 锂电池)		N/A
38.3.3.1 (g)	(Large battery assembly to LBs) (大型电池总成, 锂电池)		N/A
38.3.3.2	Testing of sodium ion cells and batteries 钠离子电池和电池的测试	NOT Na-ion Sys. 非钠离子体系	N/A
38.3.3.2 (a)~(c)	(Number and condition of cells and batteries under T.1~T.7) T.1~T.7 下的电芯/电池的数量与状态		N/A
38.3.3.2 (d)	(Small battery assembly to SIBs) (小型电池总成, 钠离子电池)		N/A
38.3.3.2 (e)	(Large battery assembly to SIBs) (大型电池总成, 钠离子电池)		N/A
38.3.4	Procedure 程序		P
38.3.4.1	Altitude Simulation 高度模拟		P
	Test samples shall be stored at a pressure of 11.6kPa or less for at least six hour at ambient temperature (20±5°C). 试验电芯和电池在环境温度(20±5°C)下, 储存在小于等于11.6kPa 的压力下至少 6 小时。		P
	Requirements: no leakage, no venting, no disassembly, no rupture, no fire, and open circuit voltage of each test cell or battery after testing is not less than 90 % of its voltage immediately prior to this procedure. 要求: 无泄漏、无排气、无解体、无破裂、无着火和每个试验电芯和电池在试验后的开路电压不小于其在进行试验前电压的90%。	See the TABLE: 38.3.4.1	P
	The requirement relating to voltage is not applicable to test cells and batteries at fully discharge states. 测试电压的要求不适用于完全放电的电芯和电池。		P
38.3.4.2	Thermal Test 温度试验		P
	Test cells and batteries are to be stored for at least six hours at a test temperature equal to 72±2°C, followed by storage for at least six hours at a test temperature equal to -40±2°C, The maximum time interval between test temperature extremes is 30 minutes, This procedure is to be repeated until 10 total cycles are complete, after which all test cells and batteries are to be stored for 24 hours at ambient temperature (20±5°C). For large cells and batteries the duration of exposure to the test temperature extremes should be at least 12hours.		P

UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.8, section 38.3 联合国《试验和标准手册》ST/SG/AC.10/11/Rev.8,section 38.3			
Clause 条款	Requirement + Test 要求+测试方法	Result - Remark 结果-备注	Verdict 判断
	将电芯和电池在温度为 $72 \pm 2^\circ\text{C}$ 的条件下贮存不少于 6 个小时；然后，在温度 $-40 \pm 2^\circ\text{C}$ 条件下贮存不少于 6 个小时；两个温度间的间隔最长为 30min,重复操作上述步骤到 10 次；然后，在环境温度为 $20 \pm 5^\circ\text{C}$ 的条件下放置 24 个小时。 大电芯和大电池储存时间至少 12h。		
	Storage duration at $72 \pm 2^\circ\text{C}$ and $-40 \pm 2^\circ\text{C}$ $72 \pm 2^\circ\text{C}$ 和 $-40 \pm 2^\circ\text{C}$ 下的储存时长	6hrs	P
	Requirements: no leakage, no venting, no disassembly, no rupture, no fire, and open circuit voltage of each test cell or battery after testing is not less than 90 % of its voltage immediately prior to this procedure. 要求：无泄漏、无排气、无解体、无破裂、无着火和每个试验电芯和电池在试验后的开路电压不小于其在进行试验前电压的 90%。	See the TABLE: 38.3.4.2	P
	The requirement relating to voltage is not applicable to test cells and batteries at fully discharge states. 测试电压的要求不适用于完全放电的电芯和电池。		P
38.3.4.3	Vibration 振动		P
	For cells and small batteries: from 7 Hz a peak acceleration of $1g_n$ is maintained until 18 Hz reached. The amplitude is then maintained at 0.8mm (1.6mm total excursion) and the frequency increased until a peak acceleration of $8g_n$ occurs (approximately 50Hz). A peak acceleration of $8g_n$ is then maintained until the frequency is increased to 200Hz. 对于电芯和小电池：保持峰值加速度 $1g_n$ ，从 7Hz 到 18Hz。然后振幅保持在 0.8mm（总偏移量为 1.6mm），增加频率，直到峰值加速度达到 $8g_n$ （约 50Hz）。然后保持 $8g_n$ 的峰值加速度，直到频率增加到 200Hz。		P
	For large batteries: from 7 Hz to a peak acceleration of $1g_n$ is maintained until 18 Hz reached. The amplitude is then maintained at 0.8 mm (1.6 mm total excursion) and the frequency increased until a peak acceleration of $2g_n$ occurs (approximately 25 Hz). A peak acceleration of $2g_n$ is then maintained until the frequency is increased to 200 Hz. 对于大电池：保持峰值加速度 $1g_n$ ，从 7Hz 到 18Hz。然后振幅保持在 0.8mm（总偏移量为 1.6mm），增加频率，直到峰值加速度达到 $2g_n$ （约 25Hz）。然后保持 $2g_n$ 的峰值加速度，直到频率增加到 200Hz。		N/A
	Requirements: no leakage, no venting, no disassembly, no rupture, no fire, and open circuit voltage of each test cell or battery after testing is not less than 90 % of its voltage immediately prior to this procedure. 要求：无泄漏、无排气、无解体、无破裂、无着火和每个试验电芯和电池在试验后的开路电压不小于其在进行试验前电压的 90%。	See the TABLE: 38.3.4.3	P
	The requirement relating to voltage is not applicable to test cells and batteries at fully discharge states. 测试电压的要求不适用于完全放电的电芯和电池。		P
38.3.4.4	Shock 冲击		P

UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.8, section 38.3 联合国《试验和标准手册》ST/SG/AC.10/11/Rev.8, section 38.3			
Clause 条款	Requirement + Test 要求+测试方法	Result - Remark 结果-备注	Verdict 判断
	<p>Each cell shall be subjected to a half-sine shock of peak acceleration of 150g_n and pulse duration of 6 milliseconds. Alternatively, large cells may be subjected to a half-sine shock of peak acceleration of 50g_n and pulse duration of 11 milliseconds.</p> <p>每一个电芯应承受峰值加速度为 150g_n、脉宽为 6 毫秒的半正弦冲击。或者，大电芯可以按峰值加速度为 50g_n、脉宽为 11 毫秒的半正弦冲击。</p> <p>Each battery shall be subjected to a half-sine shock of peak acceleration depending on the mass of the battery. The pulse duration shall be 6 milliseconds for small batteries and 11 milliseconds for large batteries.</p> <p>每个电池应承受的峰值加速度取决于电池的质量。小电池的脉宽应为 6 毫秒，大电池的脉宽应为 11 毫秒。</p> <ul style="list-style-type: none"> - For small battery, smaller one of 150g_n or $\sqrt{100850/mass}$ - For large battery, smaller one of 50g_n or $\sqrt{30000/mass}$ 		P
	<p>Peak acceleration and pulse duration: 峰值加速度和脉宽</p>	150g _n , 6ms	P
	<p>Each cell or battery shall be subjected to three shocks in the positive direction and to three shocks in the negative direction in each of three mutually perpendicular mounting positions of the cell or battery for a total of 18 shocks.</p> <p>每一个电芯或电池在安装位置的 3 个垂直的轴向的正方向和负方向各进行 3 次冲击，总共 18 次。</p>		P
	<p>Requirements: no leakage, no venting, no disassembly, no rupture, no fire, and open circuit voltage of each test cell or battery after testing is not less than 90 % of its voltage immediately prior to this procedure.</p> <p>要求：无泄漏、无排气、无解体、无破裂、无着火和每个试验电芯和电池在试验后的开路电压不小于其在进行试验前电压的 90%。</p>	See the TABLE: 38.3.4.4	P
	<p>The requirement relating to voltage is not applicable to test cells and batteries at fully discharge states.</p> <p>测试电压的要求不适用于完全放电的电芯和电池。</p>		P
38.3.4.5	External Short Circuit 外部短路		P
	<p>The cell or battery to be tested shall be heated for a period of time necessary to reach a homogeneous stabilized temperature of 57±4°C, measured on the external case.</p> <p>待测电芯或电池应加热一段时间，以稳定均衡在 57±4°C 的温度，并测量外壳上的温度。</p>		P
	<p>The exposure time shall be at least 6 hours for small cells and small batteries, and 12 hours for large cells and large batteries.</p> <p>小电芯或小电池的暴露/加热时间应至少为 6 小时，大电芯或大电池的暴露/加热时间应至少为 12 小时。</p>		P
	<p>Then the cell or battery at 57± 4°C shall be subjected to one short circuit condition with a total external resistance of less than 0.1 ohm.</p> <p>然后，在 57±4°C 下的电芯或电池应经受一次短路，外部线路总的电阻小于 0.1 欧姆。</p>	See the TABLE: 38.3.4.5	P

UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.8, section 38.3 联合国《试验和标准手册》ST/SG/AC.10/11/Rev.8, section 38.3			
Clause 条款	Requirement + Test 要求+测试方法	Result - Remark 结果-备注	Verdict 判断
	This short circuit condition is continued for at least one hour after the cell or battery external case temperature has returned to $57 \pm 4^{\circ}\text{C}$, or in the case of the large batteries, has decreased by half of the maximum temperature increase observed during the test and remains below that value. 在电芯或电池外部外壳温度恢复到 $57\pm 4^{\circ}\text{C}$ 后, 短路状态继续持续至少一小时, 或对于大电池的情况下, 降至试验期间观察到的最大温升的一半, 并保持在该值以下。		P
	The short circuit and cooling down phases shall be conducted at least at ambient temperature. 短路和冷却阶段应至少在环境温度下进行。		P
	Requirements: external case temperature does not exceed 170°C and there is no disassembly, no rupture and no fire during the test and within six hours after the test. 要求: 外部温度不超过 170°C , 试验期间和试验后 6 小时内, 无解体、破裂或起火现象。	See the TABLE: 38.3.4.5	P
38.3.4.6	Impact, Crush 撞击, 挤压		P
38.3.4.6.2	Impact 撞击		P
	Applicable to cylindrical cells not less than 18.0 mm in diameter 适用于直径不小于 18.0 mm 的圆柱型电芯。	Cylindrical cell, diameter is not less than 18mm 圆柱型电芯, 直径不小于 18mm	P
	The test cell is placed on a flat smooth surface. A stainless steel bar (type 316 or equivalent) ($\varnothing 15.8 \text{ mm} \pm 0.1 \text{ mm}$, length: $\geq 60 \text{ mm}$ or of the longest dimension of the cell, whichever is greater) is placed across the centre of the test sample. 试验电芯放置平坦表面上。一根直径为 15.8 ± 0.1 毫米, 长度至少 6 厘米 (或该电芯的最大尺寸, 以较大者为准) 的 316 型不锈钢棒横放在样品的中心。		P
	A mass of $9.1 \text{ kg} \pm 0.1 \text{ kg}$ is dropped from a height of $61 \text{ cm} \pm 2.5 \text{ cm}$ at the intersection of the bar and the test sample in a controlled manner using a near frictionless, vertical sliding track or channel with minimal drag on the falling mass. 一个重达 9.1 ± 0.1 千克的铁锤从 61 ± 2.5 厘米高处以几乎无摩擦和零拉力的姿态沿垂直轨道或通道跌落至不锈钢棒与样品的交结点上。		P
	The test sample is to be impacted with its longitudinal axis parallel to the flat surface and perpendicular to the longitudinal axis of the steel bar lying across the centre of the test sample. Each sample is to be subjected to only a single impact. 被撞击的测试样品的长轴平行于平面, 并与横放在样品中心的不锈钢棒垂直, 每只样品只经受一次撞击。		P
38.3.4.6.3	Crush 挤压		N/A

UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.8, section 38.3 联合国《试验和标准手册》ST/SG/AC.10/11/Rev.8, section 38.3			
Clause 条款	Requirement + Test 要求+测试方法	Result - Remark 结果-备注	Verdict 判断
	Applicable to prismatic, pouch, coin/button cells and cylindrical cells less than 18.0 mm in diameter. 适用于棱柱形、袋形、硬币/纽扣式电池和直径小于 18.0 mm 的圆柱型电芯。	Cylindrical cell, diameter is not less than 18mm 圆柱型电芯, 直径不小于 18mm	N/A
	A cell or component cell is to be crushed between two flat surfaces. The crushing is to be gradual with a speed of approximately 1.5cm/s at the first point of contact. 在两个平面间对电芯或元件电芯进行挤压, 挤压在第一个接触点的速度约为 1.5cm/s。		N/A
	The crushing is to be continued until the first of the three options below is reached. (a) The applied force reaches 13kN±0.78kN; (b) The voltage of the cell drops by at least 100 mV; or (c) The cell is deformed by 50% or more of its original thickness. Once the maximum pressure has been obtained, the voltage drops by 100mV or more, or the cell is deformed by at least 50% of its original thickness, the pressure shall be released. 直到发生下述三个条件中的任一条件: (a) 作用力达到 13kN±0.78kN; (b) 电芯电压下降至少 100mV; 或 (c) 电芯厚度和最初比较变形 50%以上。 一旦达到最大压力, 电压降超过 100 mV 或者电芯变形至少 50%, 压力应该解除。		N/A
	A prismatic or pouch cell shall be crushed by applying the force to the widest side. 棱形或袋装电芯应该在宽面施加挤压力。 A button/coin cell shall be crushed by applying the force on its flat surface. 纽扣/硬币电芯应该在平面施加挤压力。 For cylindrical cells, the crush force shall be applied perpendicular to longitudinal axis. 圆柱型电芯应该在长轴的垂直方向施加挤压力。		N/A
	Each test cell or component cell is to be subjected to one crushed only. The test sample shall be observed for a further 6h. The test shall be conducted using test cell or component cells that have not previously been subjected to others tests. 每一个测试的电芯或元件电芯只进行一次挤压, 测试后再观察 6h。用于测试的电芯或元件电芯之前没有进行过其它的测试。		N/A
38.3.4.6.4	Result of Impact and Crush 撞击和挤压试验结果		P
	Requirements: External temperature does not exceed 170°C and there is no disassembly and no fire during the test and within six hours after this test. 要求: 外部温度不超过 170°C, 试验期间和试验后 6 小时内, 无解体或起火现象。	See the TABLE: 38.3.4.6	P
38.3.4.7	Overcharge 过度充电		P

UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.8, section 38.3 联合国《试验和标准手册》ST/SG/AC.10/11/Rev.8,section 38.3			
Clause 条款	Requirement + Test 要求+测试方法	Result - Remark 结果-备注	Verdict 判断
	Applicable to rechargeable lithium cell/battery with overcharge protection. 适用于具有过充电保护功能的可充电锂电芯/电池。	With overcharge protection 带过充保护装置	P
	The charge current shall be twice the manufacturers' recommended maximum continuous charge current. 充电电流应为制造商推荐的最大持续充电电流的两倍。	10.4A	P
	- When the manufacturer's recommended charge voltage is not more than 18V, the minimum voltage of the test shall be the lesser of two times the maximum charge voltage of the battery or 22V. 制造商建议的充电电压不大于 18 伏时, 实验的最小电压应是电池组最大充电电压的两倍或 22 伏两者中的较小者。	30.24V	P
	- When the manufacturer's recommended charge voltage is more than 18V, the minimum voltage of the test shall be 1.2 times maximum charge voltage. 制造商建议的充电电压大于 18 伏时, 实验的最小电压应是最大充电电压的 1.2 倍。		
	Tests are to be at ambient temperature. The duration of the test shall be 24 hours. 测试在室温下进行, 测试时间为 24h。		P
	Requirements: there is no disassembly and no fire during the test and within seven days after this test. 要求: 试验期间和试验后 7 天内, 无解体或起火现象。	See the TABLE: 38.3.4.7	P
38.3.4.8	Forced Discharge 强制放电		P
	Each cell shall be forced discharged at ambient temperature by connecting it in series with a 12V D.C, power supply at an initial current equal to the maximum discharge current specified by the manufacturer. 在环境温度下, 将单个电芯连接在 12V 的直流电源上进行强制放电, 此直流电源提供给每个电芯的初始电流为制造厂指定的最大放电电流。		P
	Requirements: there is no disassembly and no fire during the test and within seven days after this test. 要求: 试验期间和试验后 7 天, 无解体或起火现象。	See the TABLE: 38.3.4.8	P

TABLE: 38.3.4.1 Altitude simulation 高度模拟							P
Sample No.	Before Test		After Test		Mass loss (%)	Residual OCV (%)	Results
	Mass(g)	OCV(V)	Mass(g)	OCV(V)			
Fully charged at first cycle 一次循环后完全充电状态							
B1#	1404.450	24.95	1404.326	24.87	0.009	99.68	O
B2#	1403.213	24.96	1403.135	24.88	0.006	99.68	O
B3#	1403.654	24.96	1403.544	24.88	0.008	99.68	O
B4#	1403.899	24.96	1403.775	24.88	0.009	99.68	O
Fully charged after 25 cycles 25次循环后完全充电状态							
B5#	1403.877	24.96	1403.756	24.88	0.009	99.68	O
B6#	1404.115	24.96	1404.036	24.88	0.006	99.68	O
B7#	1403.756	24.96	1403.626	24.88	0.009	99.68	O
B8#	1403.988	24.96	1403.874	24.88	0.008	99.68	O
Results: O = no leakage, no venting, no disassembly, no rupture, no fire, and the open circuit voltage drop not less than 90%							

TABLE: 38.3.4.2 Thermal test 温度试验							P
Sample No.	Before Test		After Test		Mass loss (%)	Residual OCV (%)	Results
	Mass(g)	OCV(V)	Mass(g)	OCV(V)			
Fully charged at first cycle 一次循环后完全充电状态							
B1#	1404.326	24.87	1403.398	24.61	0.066	98.95	O
B2#	1403.135	24.88	1402.314	24.61	0.059	98.91	O
B3#	1403.544	24.88	1402.586	24.61	0.068	98.91	O
B4#	1403.775	24.88	1402.823	24.61	0.068	98.91	O
Fully charged after 25 cycles 25次循环后完全充电状态							
B5#	1403.756	24.88	1402.845	24.61	0.065	98.91	O
B6#	1404.036	24.88	1403.211	24.61	0.059	98.91	O
B7#	1403.626	24.88	1402.765	24.61	0.061	98.91	O
B8#	1403.874	24.88	1402.942	24.61	0.066	98.91	O
Results: O = no leakage, no venting, no disassembly, no rupture, no fire, and the open circuit voltage drop not less than 90%							

TABLE: 38.3.4.3 Vibration 振动							P
Sample No.	Before Test		After Test		Mass loss (%)	Residual OCV (%)	Results
	Mass(g)	OCV(V)	Mass(g)	OCV(V)			
Fully charged at first cycle 一次循环后完全充电状态							
B1#	1403.398	24.61	1403.332	24.59	0.005	99.92	O
B2#	1402.314	24.61	1402.285	24.61	0.002	100.00	O
B3#	1402.586	24.61	1402.533	24.61	0.004	100.00	O
B4#	1402.823	24.61	1402.786	24.60	0.003	99.96	O
Fully charged after 25 cycles 25次循环后完全充电状态							
B5#	1402.845	24.61	1402.806	24.61	0.003	100.00	O
B6#	1403.211	24.61	1403.168	24.61	0.003	100.00	O
B7#	1402.765	24.61	1402.703	24.60	0.004	99.96	O
B8#	1402.942	24.61	1402.911	24.61	0.002	100.00	O
Results: O = no leakage, no venting, no disassembly, no rupture, no fire, and the open circuit voltage drop not less than 90%							

TABLE: 38.3.4.4 Shock 冲击							P
Sample No.	Before Test		After Test		Mass loss (%)	Residual OCV (%)	Results
	Mass(g)	OCV(V)	Mass(g)	OCV(V)			
Fully charged at first cycle 一次循环后完全充电状态							
B1#	1403.332	24.59	1403.320	24.59	0.001	100.00	O
B2#	1402.285	24.61	1402.274	24.61	0.001	100.00	O
B3#	1402.533	24.61	1402.517	24.61	0.001	100.00	O
B4#	1402.786	24.60	1402.760	24.60	0.002	100.00	O
Fully charged after 25 cycles 25次循环后完全充电状态							
B5#	1402.806	24.61	1402.784	24.60	0.002	99.96	O
B6#	1403.168	24.61	1403.155	24.60	0.001	99.96	O
B7#	1402.703	24.60	1402.688	24.60	0.001	100.00	O
B8#	1402.911	24.61	1402.895	24.61	0.001	100.00	O
Results: O = no leakage, no venting, no disassembly, no rupture, no fire, and the open circuit voltage drop not less than 90%							

TABLE: 38.3.4.5 External Short-circuit 外部短路				P
Sample No.	Ambient(°C) (At 57± 4°C)	Testing resistance (mΩ)	Max. External Temperature(°C)	Results
Fully charged at first cycle 一次循环后完全充电状态				
B1#	57.1	87.2	58.2	O
B2#	57.1	85.2	57.6	O
B3#	57.1	84.2	57.8	O
B4#	57.1	87.0	57.9	O
Fully charged after 25 cycles 25次循环后完全充电状态				
B5#	57.0	85.2	57.8	O
B6#	57.0	85.8	58.0	O
B7#	57.0	87.7	58.0	O
B8#	57.0	86.4	57.9	O
Results: O = no disassembly, no rupture, no fire during the test and within six hours after the test.				


TABLE: 38.3.4.6 Impact 撞击				P	
TABLE: 38.3.4.6 Crush 挤压				N/A	
Sample No.	Max. External Temperature(°C)	Results	Sample No.	Max. External Temperature(°C)	Results
50% of the design rated capacity at first cycle 一次循环后 50%设计容量			50% of the design rated capacity after 25 cycles 25次循环后 50%设计容量		
C1#	22.7	O	C6#	22.2	O
C2#	24.5	O	C7#	23.4	O
C3#	22.2	O	C8#	23.5	O
C4#	24.2	O	C9#	23.3	O
C5#	24.7	O	C10#	22.3	O
Results: O = no disassembly, no fire during the test and within six hours after this test.					

TABLE: 38.3.4.7 Overcharge 过度充电					P
The test current =10.4 A					-
The test voltage =30.24 V					-
Sample No.	OCV(V)	Results	Sample No.	OCV(V)	Results
Fully charged at first cycle 一次循环后完全充电状态			Fully charged after 25 cycles 25次循环后完全充电状态		
B9#	24.95	O	B13#	24.96	O
B10#	24.96	O	B14#	24.96	O
B11#	24.96	O	B15#	24.96	O
B12#	24.96	O	B16#	24.96	O
Results: O = no disassembly, no fire during the test and within seven days after this test.					


TABLE: 38.3.4.8 Forced discharge 强制放电					P
Sample No.	OCV(V)	Results	Sample No.	OCV(V)	Results
Fully discharged at first cycle 一次循环后完全放电状态			Fully discharged after 25 cycles 25次循环后完全放电状态		
C11#	3.388	O	C21#	3.384	O
C12#	3.392	O	C22#	3.393	O
C13#	3.402	O	C23#	3.401	O
C14#	3.404	O	C24#	3.387	O
C15#	3.396	O	C25#	3.405	O
C16#	3.404	O	C26#	3.396	O
C17#	3.401	O	C27#	3.389	O
C18#	3.401	O	C28#	3.397	O
C19#	3.389	O	C29#	3.395	O
C20#	3.378	O	C30#	3.401	O
Results: O = no disassembly, no fire during the test and within seven days after this test.					

Photos of the Battery 电池照片

View 1/视图 1

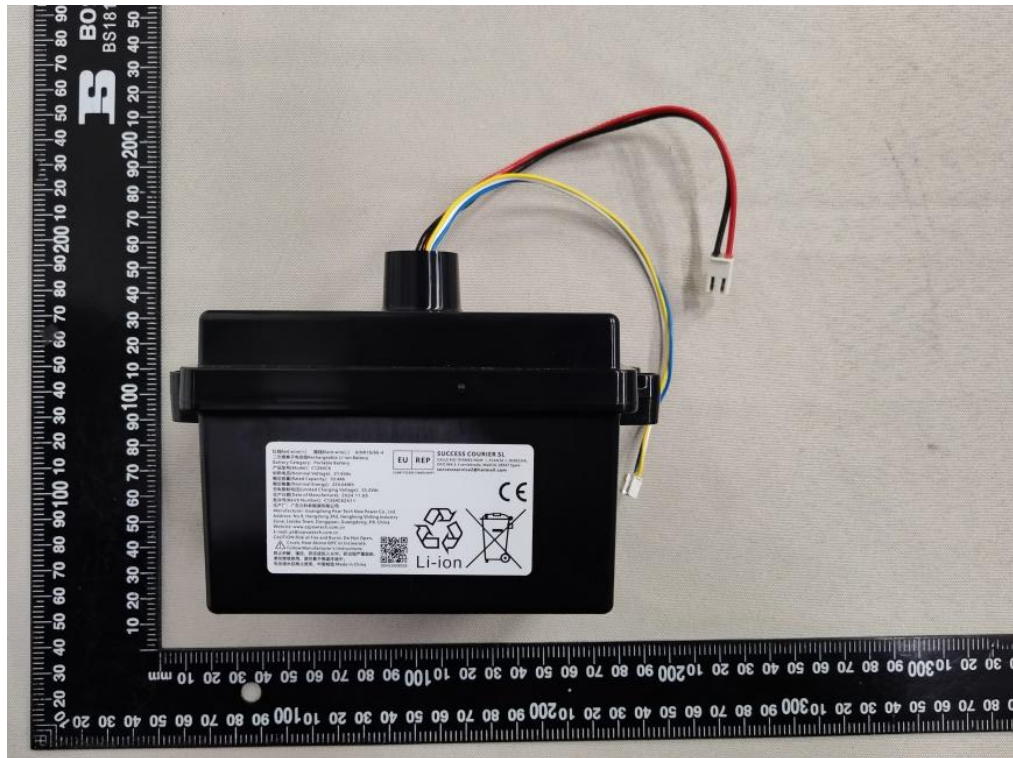

View 2/视图 2

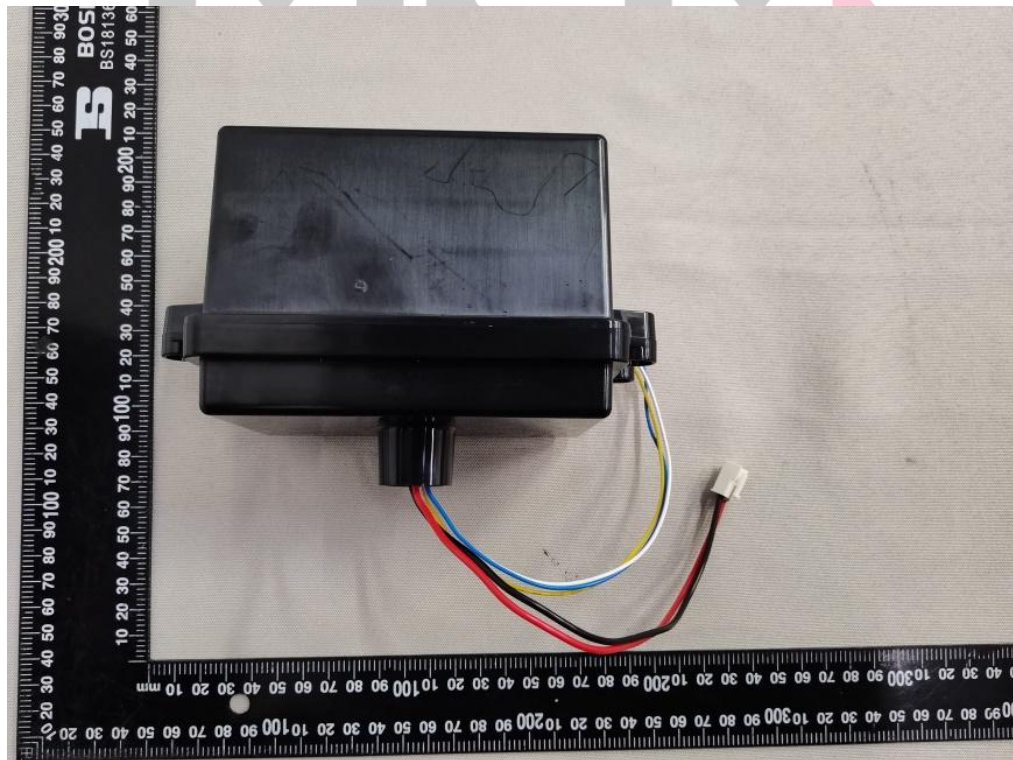

Photos of the Cell 电芯照片

View 1/视图 1



View 2/视图 2



-- End of Report --

Important Note
注意事项

1. This test report is invalid without the special testing seal and cross-page seal of Guangzhou MCM Certification & Testing Co., Ltd.
本检测报告无广州邦禾检测技术有限公司检测专用章、骑缝章无效。
2. Nobody is allowed to partly photocopy this test report without written permission of Guangzhou MCM Certification & Testing Co., Ltd.
未经广州邦禾检测技术有限公司书面同意，不得部分复制本检测报告。
3. This test report is invalid without the signatures of Approver, Reviewer and Tester.
本检测报告无批准人、审核人及检测员签名无效。
4. This test report is invalid if altered.
本检测报告涂改无效。
5. Objection to this test report must be submitted to Guangzhou MCM Certification & Testing Co., Ltd. within 15 days after the publication of the report.
若对此检测报告有异议，必须在报告发布之日起十五天内向广州邦禾检测技术有限公司提出。
6. This test report is only responsible for the received samples.
本检测报告仅对收到的样品负责。
7. As for the test results, "N/A" means "Not applicable", "P" means "Pass" and "F" means "Fail".
本检测结果判定中"N/A"表示“不适用”，"P"表示“通过”，"F"表示“不通过”。

Testing Lab.:	Guangzhou MCM Certification & Testing Co., Ltd.
检测单位:	广州邦禾检测技术有限公司
Address:	Building 2 No. 45 Zhong Er Section of Shiguang Road, Zhongcun Street, Panyu District, Guangzhou City, Guangdong Province, China.
地址:	中国 广东省广州市番禺区钟村街市广路钟二路段 45 号 2 栋
Tel/电话:	+86-20-3477 7662 或 0086-020-3477 7662
Email/电子邮箱:	service@mcmtek.com
Web/公司网址:	https://www.mcmtek.com